




NEXT GENERATION GUTTER LINER SYSTEM




Before installing EZ Roof Gutter Liner ensure that the gutter is thoroughly cleaned and that the outlets are smooth. Any protrusions such as joint bolts etc should be cut back and filed down, and if necessary covered to protect the new liner from damage. Fitting is easy, just tuck the EZ Roof Gutter Liner over the top edge of the gutter and under the cladding.

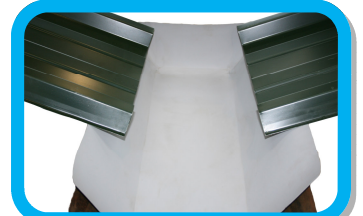

Another method is to fold the liner back on itself, ensuring that the fold is secured with fixings through the cladding. Take care with boundary wall gutters that the liner is secured well up behind the vertical cladding or fastened to the wall with a plastic coated termination flashing. Gutters with an open edge can be terminated with a plastic coated capping.



To form the stop ends gently warm the liner and fold into the corner of the stop end. When the liner has cooled trim it back to the top edge of the stop end. Make a template of the end of the gutter. Mark up the plastic coated steel blanks and cut to size using tin snips. Fix into position with bolts or self drilling screws.

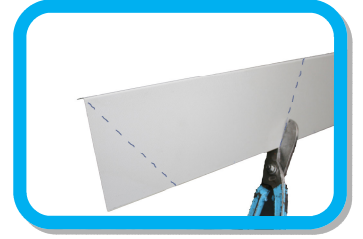

Cut out the downspout hole in the liner with a suitable core drill or sharp knife. Insert the pre-formed outlet and heat weld into position. In gutters with angled side outlets a bespoke outlet can be supplied and welded or adhered into position.



Self adhesive outlets are also available and are easily installed. Gutters with open edges are simply capped with a plastic coated metal flashing covering the exposed edge of the gutter.



Before ordering determine the overall width required allowing for sufficient extra width at each side for fixing under the cladding etc. Measure the inside profile of the gutter indicating the distance between each angle change where a crease is required. EZ Roof Gutter Liner is supplied in one length but please remember to allow at least 300mm at each end to form a stop end. Download the EZ Roof Gutter Liner enquiry form, enter the measurements and your details and fax this to us. We will provide you with a free sample so you can confirm that it fits your gutter. Once you are satisfied with the fit you can order your gutter liner quickly through our website.